


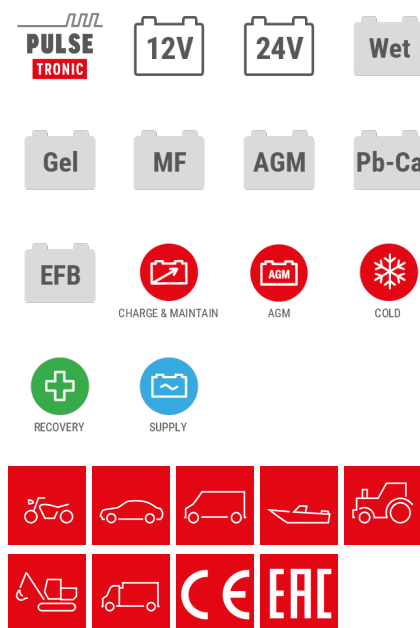

- Multi-functional electronic battery charger, maintainer and tester for WET, GEL, AGM, MF, PbCa, EFB, Li 12/24V batteries.
- Automatic charging and maintenance in Pulse Tronic. Choice 2 charge voltages: 12V/24V. Charging level led display.
- Advanced functions: AGM for charging and maintaining AGM batteries; COLD for charging and maintaining batteries at low temperatures; RECOVERY to recover sulphated batteries.
- IP65 level ensures protection against dust, water and humidity. Compact and lightweight, for easy transport and positioning.
- Safety guaranteed by protection against overcharging, short circuit and pole inversion.
- Cable with clamps and cable with eyelets.

TECHNICAL DATA

CODE	807594	CHARGING VOLTAGE	12 / 24 V	MAX.RATED REFERENCE CAPAC.	180 Ah
SINGLEPHASE MAINS VOLTAGE	230 V	EFFICIENT CHARGING CURRENT	8 / 4 A	PROTECTION DEGREE	IP65
MAINS FREQUENCY	50 / 60 Hz	RATED CHAR.CUR.EN60335-2-29	8 / 4 A	DIMENSIONS (LxWxH)	6,7 x 27 x 12 cm
CHARGING ABSORBED POWER	115 W	MIN.RATED REFERENCE CAPAC.	5 Ah	WEIGHT	1,33 kg

SUPPLIED ACCESSORIES

125069	CLAMPS PATCH CORD
125070	EYELETS PATCH CORD

OPTIONAL ACCESSORIES

OTHER CHARGING/STARTING ACCESS

803088	MAGNETS 2 PCS
802986	BATTERY CONNECTOR WITH EYELETS M6
804037	BATTERY CONNECTOR WITH EYELETS M8
804038	CONNECTOR WITH CAR AND MOTORBIKE 12V CIGARETTE LIGHTER PLUG

DESCRIPTION

Multi-functional electronic battery charger and maintainer for WET, GEL, AGM, MF, PbCa, EFB, 12V/24V batteries. Choice of 2 charging voltages in Pulse Tronic mode: 12V / 24V. Automatic choice of charging current. Advanced functions for charging and maintaining batteries at low temperatures and for AGM batteries. Activation of the RECOVERY function enables resetting of sulphated batteries.

Features:

- Automatic charge and maintenance in Pulse Tronic;
- 2 charging voltages;
- Led display of battery charge level;
- AGM function to charge and maintain AGM batteries;
- COLD function to charge and maintain batteries at low temperatures;
- RECOVERY function to recover sulphated batteries;
- SUPPLY function for stable power supply during battery changing;
- Protection against overcharge, short circuit and polarity reversal.

Complete with cable with clamps and cable with eyelets.

DOWNLOAD



CATALOG IMAGE



INSTRUCTION MANUAL



BROCHURE