


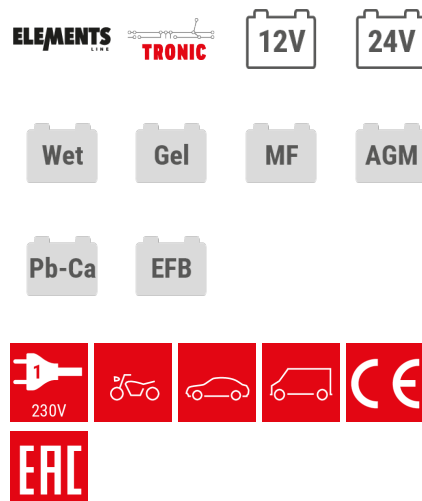

- Battery charger and maintainer with TRONIC technology for WET, GEL, Pb-Ca, AGM, MF, EFB 12/24 V batteries.
- Battery charge status LED signal. Key to set the voltage (12 and 24 V).
- Protection against overcharging, pole inversion and recognition of charge voltage.
- Light and compact.

TECHNICAL DATA

CODE	807852	CHARGING VOLTAGE	12 / 24 V	MAX.RATED REFERENCE CAPAC.	115 / 55 Ah
SINGLEPHASE MAINS VOLTAGE	220-240 V	EFFICIENT CHARGING CURRENT	12 / 6,5 A	DIMENSIONS (LxWxH)	12 x 19,5 x 19 cm
MAINS FREQUENCY	50 / 60 Hz	RATED CHAR.CUR.EN60335-2-29	6 / 4,5 A	WEIGHT	2,9 kg
CHARGING ABSORBED POWER	130 W	MIN.RATED REFERENCE CAPAC.	50 / 30 Ah		

DESCRIPTION

Electronic battery charger and maintainer with TRONIC technology for 12V/24V WET, GEL, AGM, MF, PbCa, EFB batteries.

LED visualization of the charge level.

Features:

- Automatic charge and maintenance in Tronic;
- 2 charge voltages;
- Protections against overloads, polarity reversal and battery voltage detection.

Equipped with cable with clamps.

DOWNLOAD



CATALOG IMAGE



INSTRUCTION MANUAL



CERTIFICATE